




Plasterboard



Easy-Fit



Concrete wall

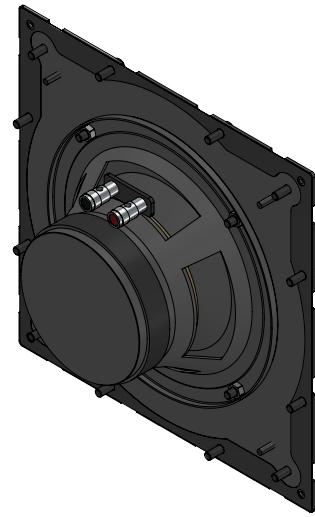

**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**
3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

In-wall and in-ceiling 5.25" (130 mm), 100 W max, coaxial in-wall and in-ceiling speaker with steel mounting frame and speaker body, designed for optimal performance and durability, even in harsh environments. This product supports recessed installation with various integration solutions, including FiloMuro™, suitable for plasterboard and masonry walls, and EasyFit™, ideal for installation in plasterboard walls or other materials such as wood paneling, metal, and porcelain tiles, with thicknesses ranging from 4 to 40 mm. The 5.25" (130 mm) coaxial loudspeaker has a cataphoresis-treated magnetic assembly for corrosion resistance, a treated cellulose cone, a rubber surround, and a 0.5" (14 mm) neodymium tweeter concentrically aligned with the woofer for a balanced, linear sound throughout the frequency range and excellent intelligibility on vocals. Connection to the amplifier is via spring-loaded terminals that can accommodate cables up to AWG14 gauge. The aesthetic cover is securely attached by powerful neodymium magnets. The grille cover can be customized in various materials, including perforated steel that can be painted white tinted or prepainted according to RAL or NCS codes and even treated with galvanic effects. In addition, fabric covers can be used, which are available in a wide selection of textures and colors as shown in Garvan's sample books.

KEY FEATURES

3" (76 mm) Full-Range Driver

Delivers natural sound with a treated cellulose cone and rubber surround for excellent voice intelligibility.

High Output Performance

80 W max power with up to 111.5 dB SPL at 1 meter.

Flush-Mount Design

Designed for seamless in-wall or in-ceiling installation with invisible integration.

Marine-Grade Backbox

Built with phenolic marine plywood and steel frame, ideal for harsh or humid environments.

FiloMuro™ System for Masonry

Precise flush installation with alignment and clean finishes on plastered surfaces.

EasyFit™ Front Mounting

Tool-free installation on various materials (drywall, wood, steel, porcelain), 4–40 mm thick.

Flexible Aesthetic Options

Customizable grille: perforated steel, galvanic finishes, graphic prints, or acoustic fabrics.

Magnetic Grille Attachment


Strong neodymium magnets ensure fast and secure cover placement.

Quick Spring-Terminal Connection

Compatible with cables up to AWG14 for fast and safe wiring.

Extended Warranty

3+1+1 years warranty included, free extension available.

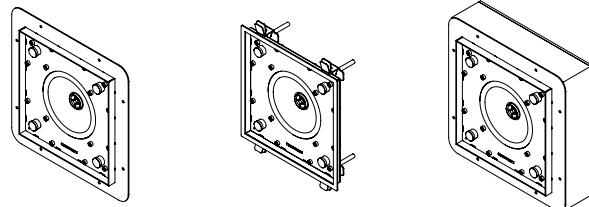

INSTALLATION NAME	Flush-Mount™ Plasterboard	Easy-Fit™	Flush-Mount™ Concrete wall
Installation Type	In Wall / In Ceiling Speaker, free air	In Wall / In Ceiling Speaker, free air	In Wall / In Ceiling Speaker, Closed box
Surface Compatibility	Suitable for installation in Plasterboard, wooden panels, modular panel, and similar.	Suitable for installation in Plasterboard, wooden panels, modular panel, and similar.	Suitable for installation in Concrete Wall and similar.
Installation Requirements	Required support thickness: 12,5-25mm	Required support thickness: 4-40mm	Minimum required wall thickness: 90mm
SINGLE LOUDSPEAKER PERFORMANCE			
AES Power Handling	50 W	50 W	50 W
Continuous Power Handling ***	100 W	100 W	100 W
Sensitivity 2,83V / 1m ****	88,5 dB	88,5 dB	89 dB
Sensitivity 1W/1m ****	88,5 dB	88,5 dB	89 dB
Calculated Maximum SPL @ 1m*	117,5 dB	117,5 dB	118 dB
TRANSDUCER			
Type	Coaxial	Coaxial	Coaxial
Nominal size	WF 130 mm + TW 14mm	WF 130 mm + TW 14mm	WF 130 mm + TW 14mm
Nominal Impedance	8Ω	8Ω	8Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available	Not required, Garvan Preset EQ, Filter and protection available	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	80 Hz with 48 dB/Oct. High pass Filter	80 Hz with 48 dB/Oct. High pass Filter	65 Hz with 48 dB/Oct. High pass Filter
Frequency Response (-3 dB)	95 Hz – 20 kHz **	95 Hz – 20 kHz **	95 Hz – 20 kHz **
Frequency Range (-10 dB)	56 Hz - 20 kHz	56 Hz - 20 kHz	60 Hz - 20 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)	110°	110°	110°
Nominal Coverage (1 KHz – 10 kHz)	90°	90°	90°
PHYSICAL			
Frame Material	zinc-plated metal	zinc-plated metal	"zinc-plated metal + phenolic multilayer wood"
Speaker support Material	Lacquered or galvanic metal support	Lacquered or galvanic metal support	Lacquered or galvanic metal support
Cover	Lacquered or galvanic metal Grille/Brushed stainlenss steel Grille / Fabric covered frame.	Lacquered or galvanic metal Grille/Brushed stainlenss steel Grille / Fabric covered frame.	Lacquered or galvanic metal Grille/Brushed stainlenss steel Grille / Fabric covered frame.

ENVIRONMENTAL FEATURES				
Environment of Use	Indoor environments	Indoor environments	Indoor environments	
Operating Temperature Range ***** environmental protection.				
Connectors	Push connector, mounted on speaker. Accepts 18 AWG (0.8 mm ²) to 15 AWG (2,08 mm ²) size wire.	Push connector, mounted on speaker. Accepts 18 AWG (0.8 mm ²) to 15 AWG (2,08 mm ²) size wire.	Push connector, mounted on speaker. Accepts 18 AWG (0.8 mm ²) to 15 AWG (2,08 mm ²) size wire.	
Maximum Ceiling Thickness				
Product Dimensions				
Ceiling Cutout				
Net Weight, Frame				
Net Weight, Loudspeaker				
Net Weight, Cover				
LOGISTICAL DATA				
Packaging dimensions				
Shipping Weight				
Quantity of products per package	1 to 2 based on logistics optimization per shipment	1 to 2 based on logistics optimization per shipment	1 to 2 based on logistics optimization per shipment	
MAINTENANCE				
Cleaning Method	microfiber cloth	microfiber cloth	microfiber cloth	
General precautions	do not use harsh cleaning products	do not use harsh cleaning products	do not use harsh cleaning products	
INCLUDED ACCESSORIES				
	Jig set	Jig set	Jig set	
OPTIONAL ACCESSORIES				
Transformer for hight line voltage	TRT052 - 70/100V - 25/37/50W	TRT052 - 70/100V - 25/37/50W	TRT052 - 70/100V - 25/37/50W	
Transformer for hight line voltage	TRT054 - 70/100V - 10/15/20W	TRT054 - 70/100V - 10/15/20W	TRT054 - 70/100V - 10/15/20W	
Cover installation kit	GAR136	GAR136	GAR136	
Sound-absorbing material kit for installation				
Cable size/load 2 sq mm. 2,5 sq mm. 4 sq mm.	8 ohm 20m / 65ft. 30m / 100ft. 60m / 200ft.	4 ohm 10m / 32ft 15m / 50ft 30m / 100ft	2 ohm 5m / 16ft 7,5m / 25ft 15m / 50ft	

NOTES:

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset

*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.






**** average SPL measured from 200 Hz to 1,5 kHz

***** With dedicated ignition and maintenance process


FLUSH-MOUNT™ CODES

1 Loudspeaker **KR112**
 2 Frame **CC1919**
 3 Front cover **11BXX**


AES POWER **50 W**
 TYPE **COAXIAL**
 NOM. SIZE **WF 130 MM + TW 14MM**
 NOM. IMP. **8Ω**

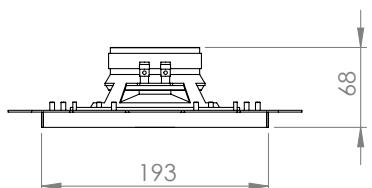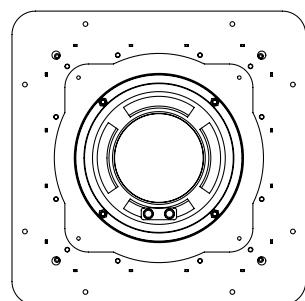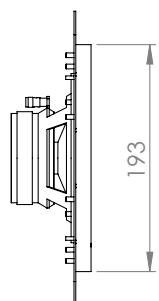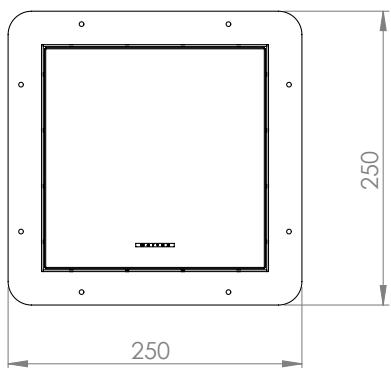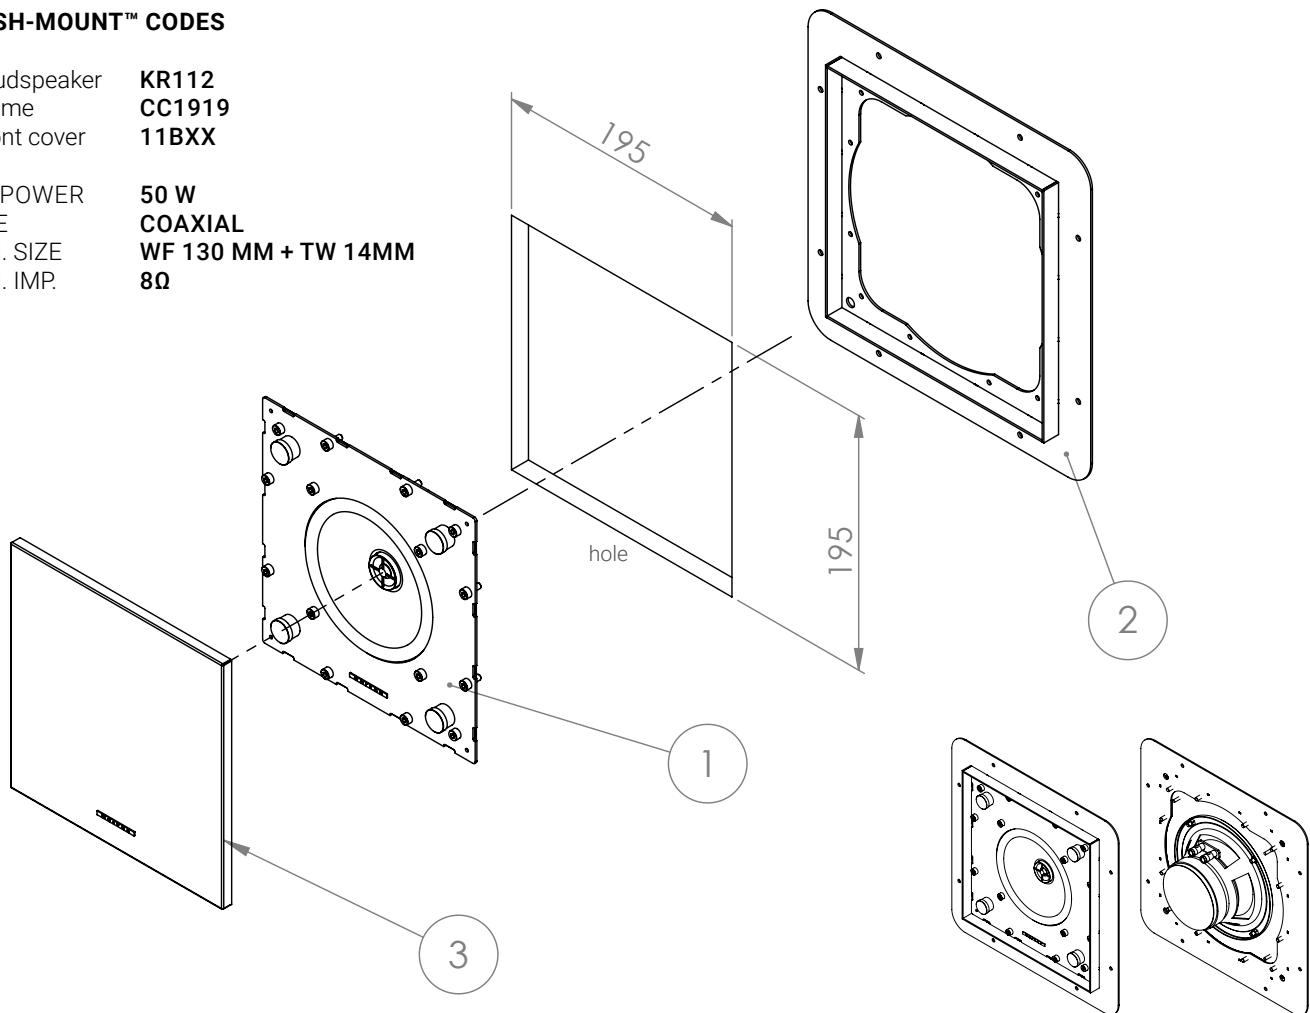


INST. INSTRUCTIONS KR112 / CC1919 Flush-Mount™Plasterboard

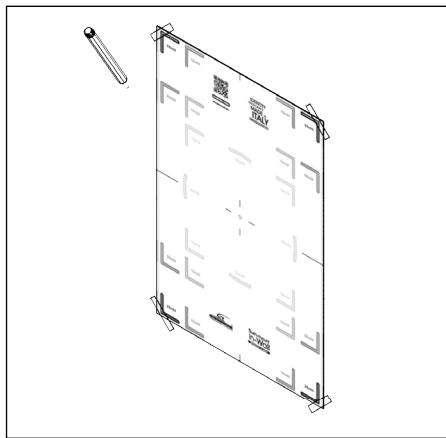


1 Jig set

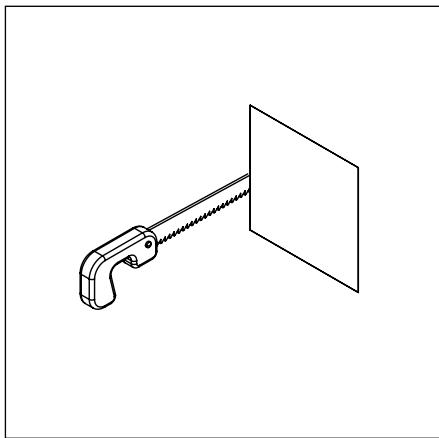


2

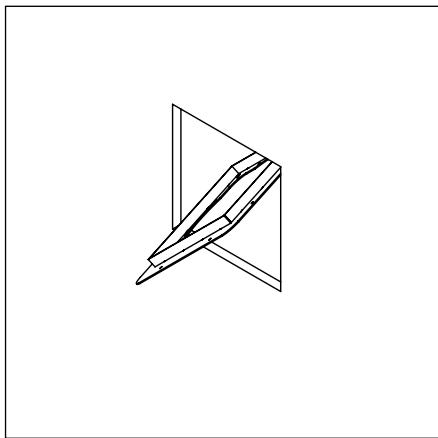


3

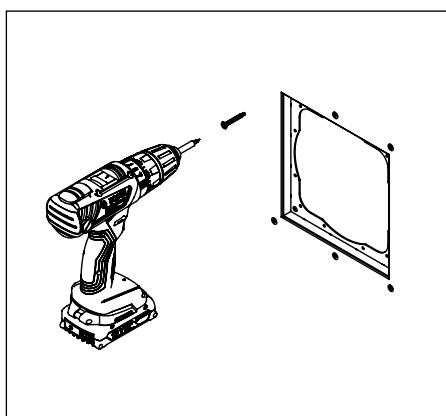


4

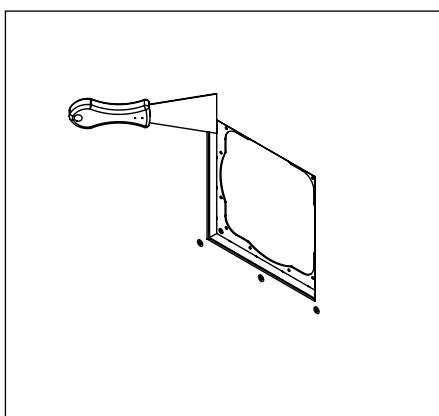


5

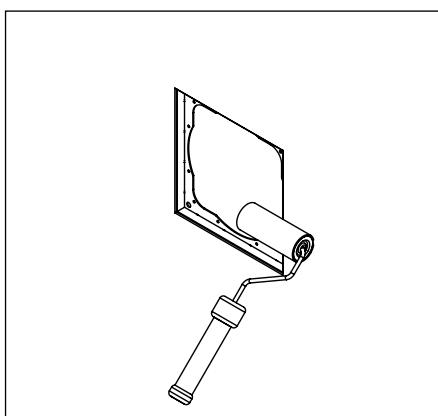


6

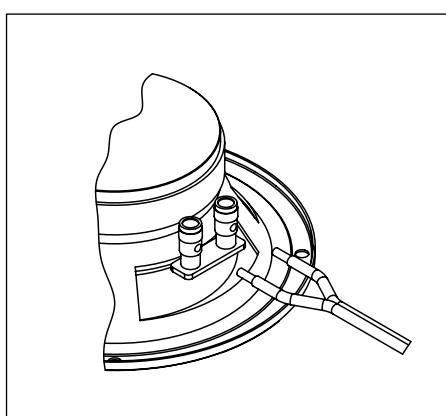


7

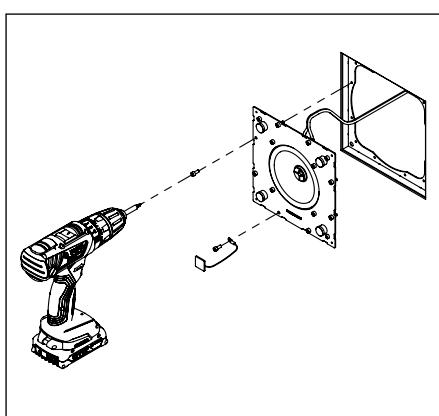


8

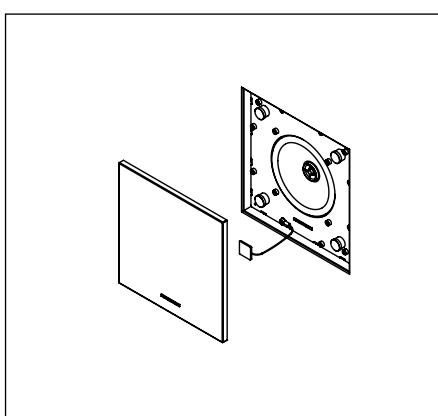


9

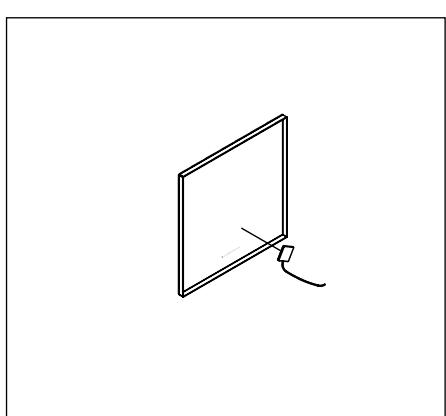

10

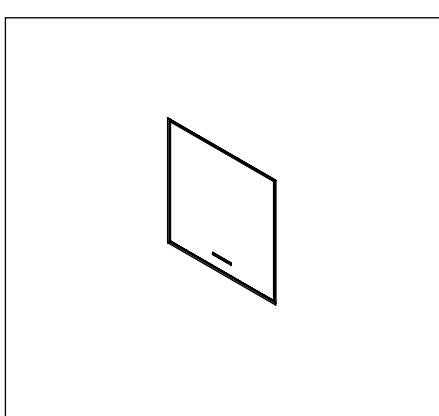



11




EASY-FIT™ CODES

1 Loudspeaker **KR112**
 2 Frame **CF1919**
 3 Front cover **11BXX**


AES POWER **50 W**
 TYPE **COAXIAL**
 NOM. SIZE **WF 130 MM + TW 14MM**
 NOM. IMP. **8Ω**

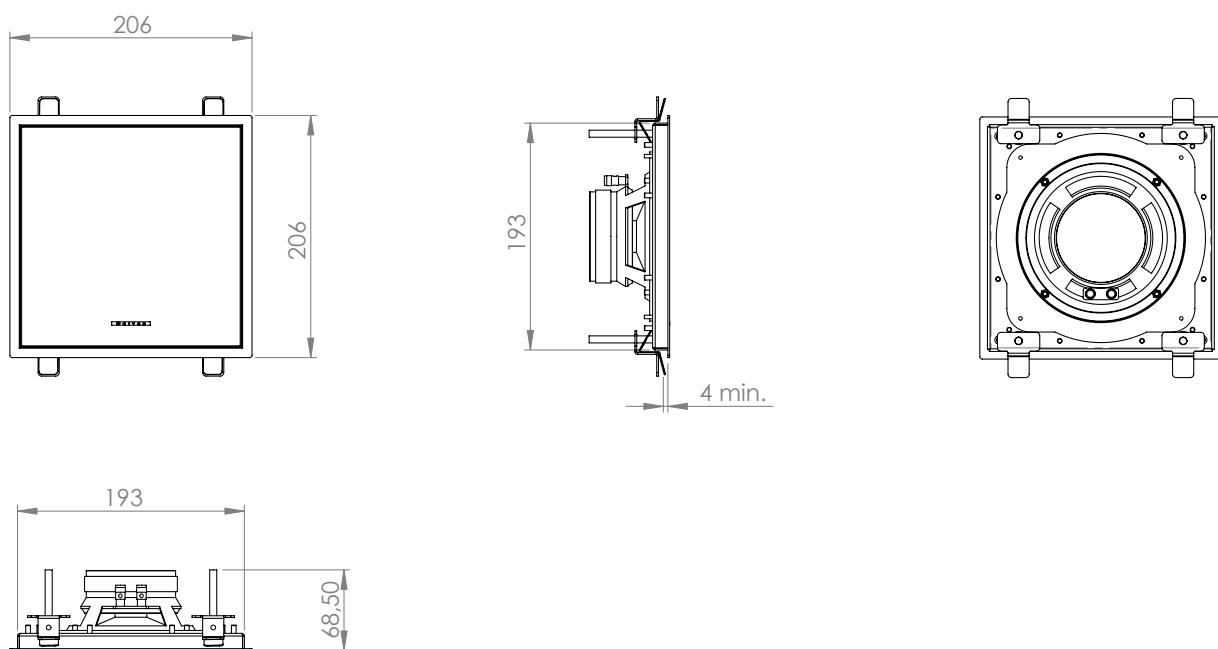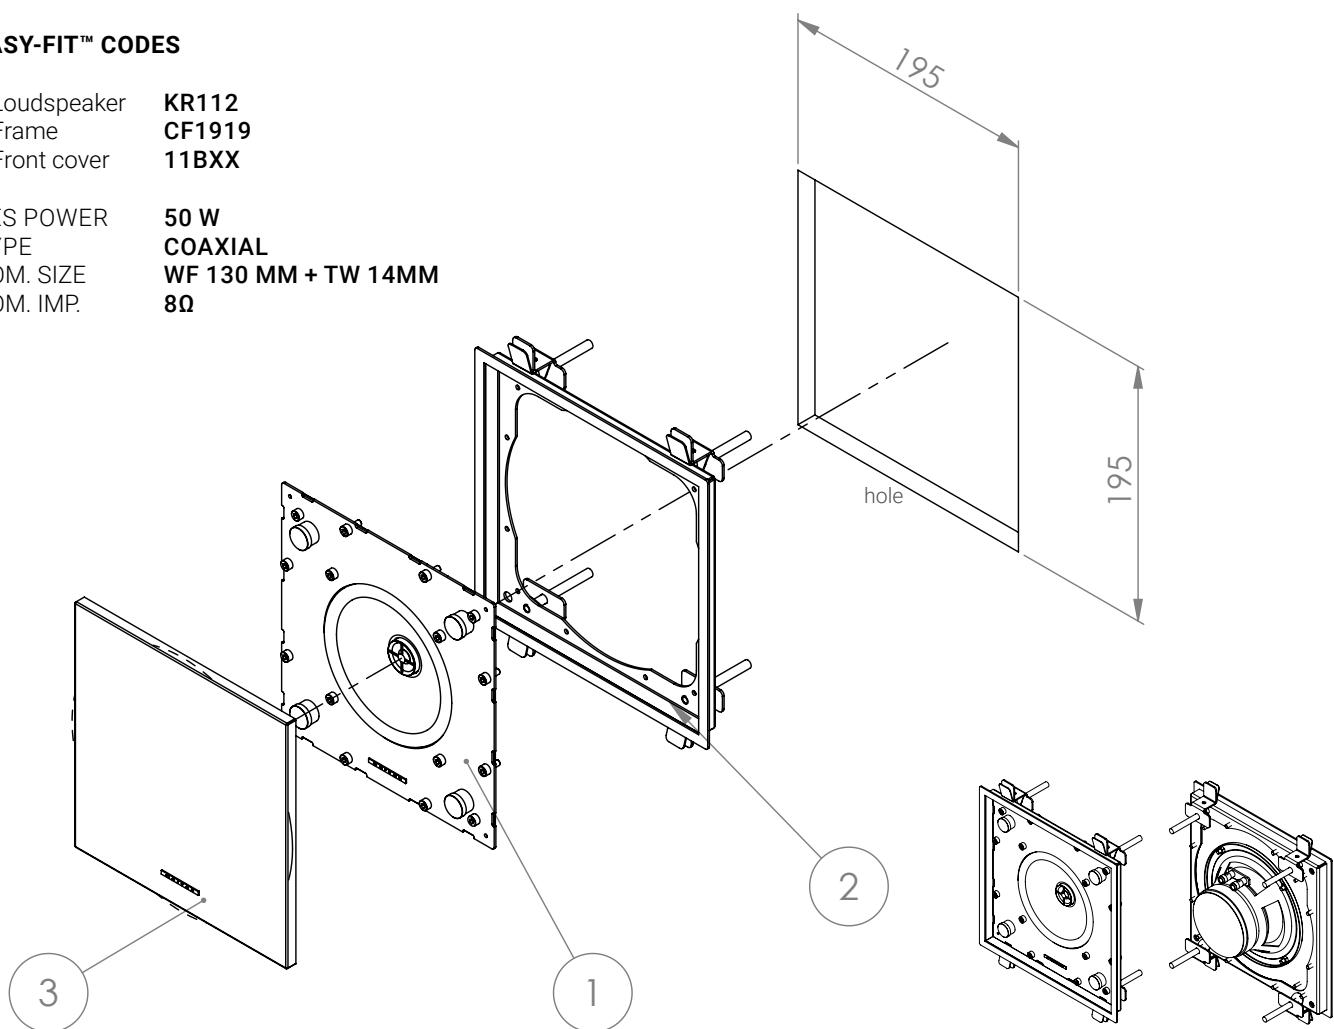


INSTALLATION INSTRUCTIONS KR112 / CF1919 Easy-fit™

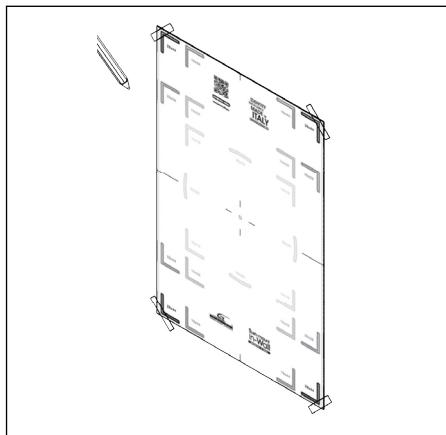


1 Jig set

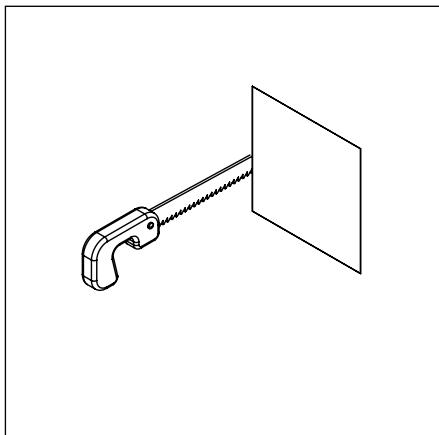


2

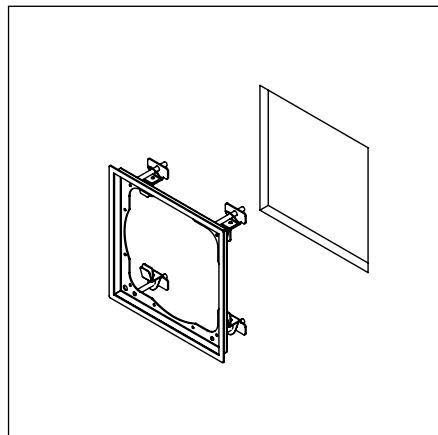


3

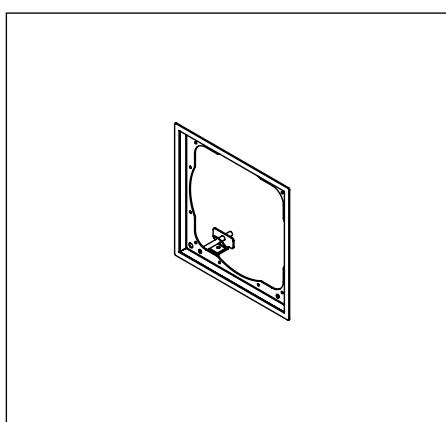


4

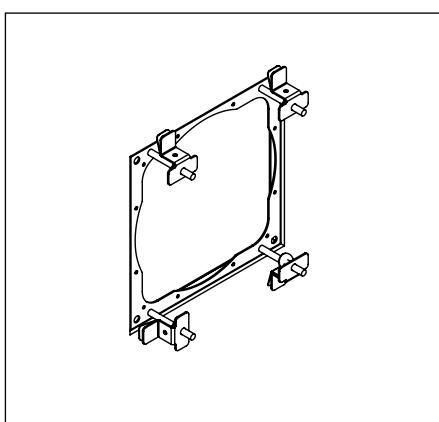


5

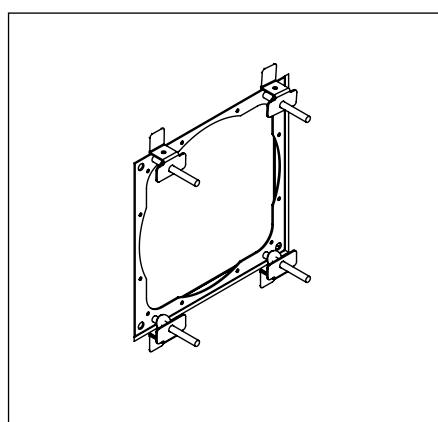


6

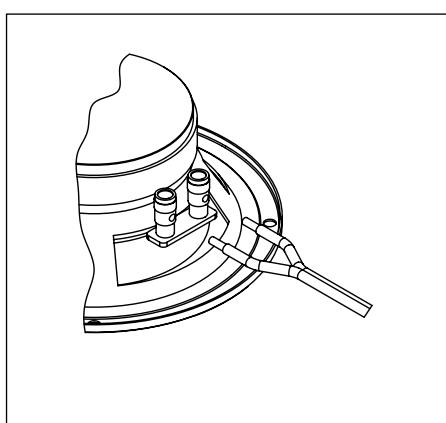


7

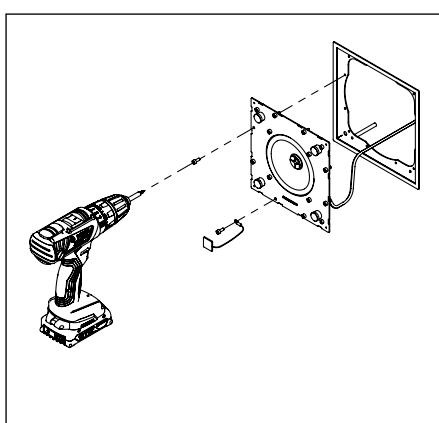


8

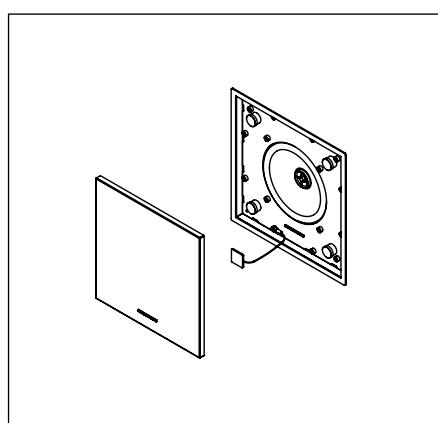

9

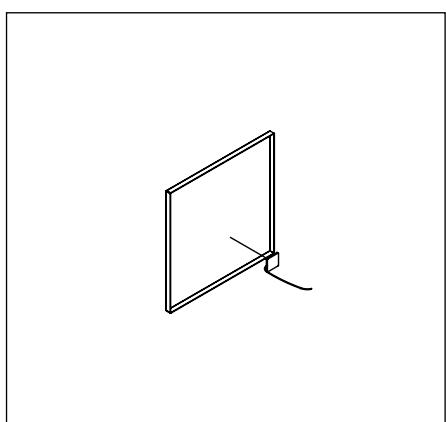

10

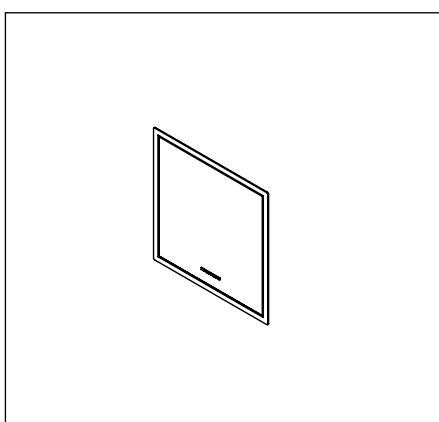






11




FLUSH-MOUNT™ CODES

1 Loudspeaker **KR112**
 2 Frame **CM1919**
 3 Front cover **11BXX**


AES POWER **50 W**
 TYPE **COAXIAL**
 NOM. SIZE **WF 130 MM + TW 14MM**
 NOM. IMP. **8Ω**

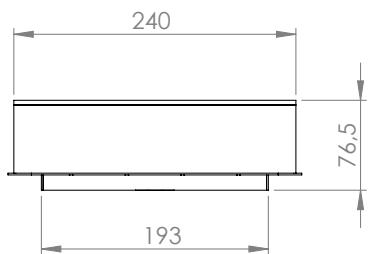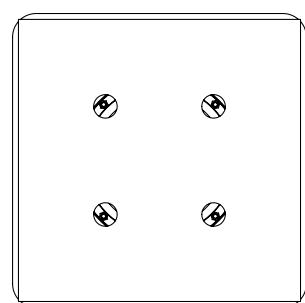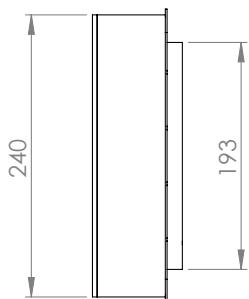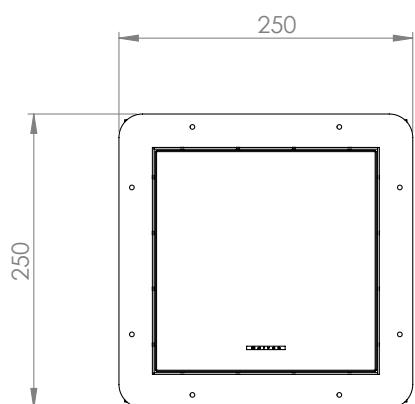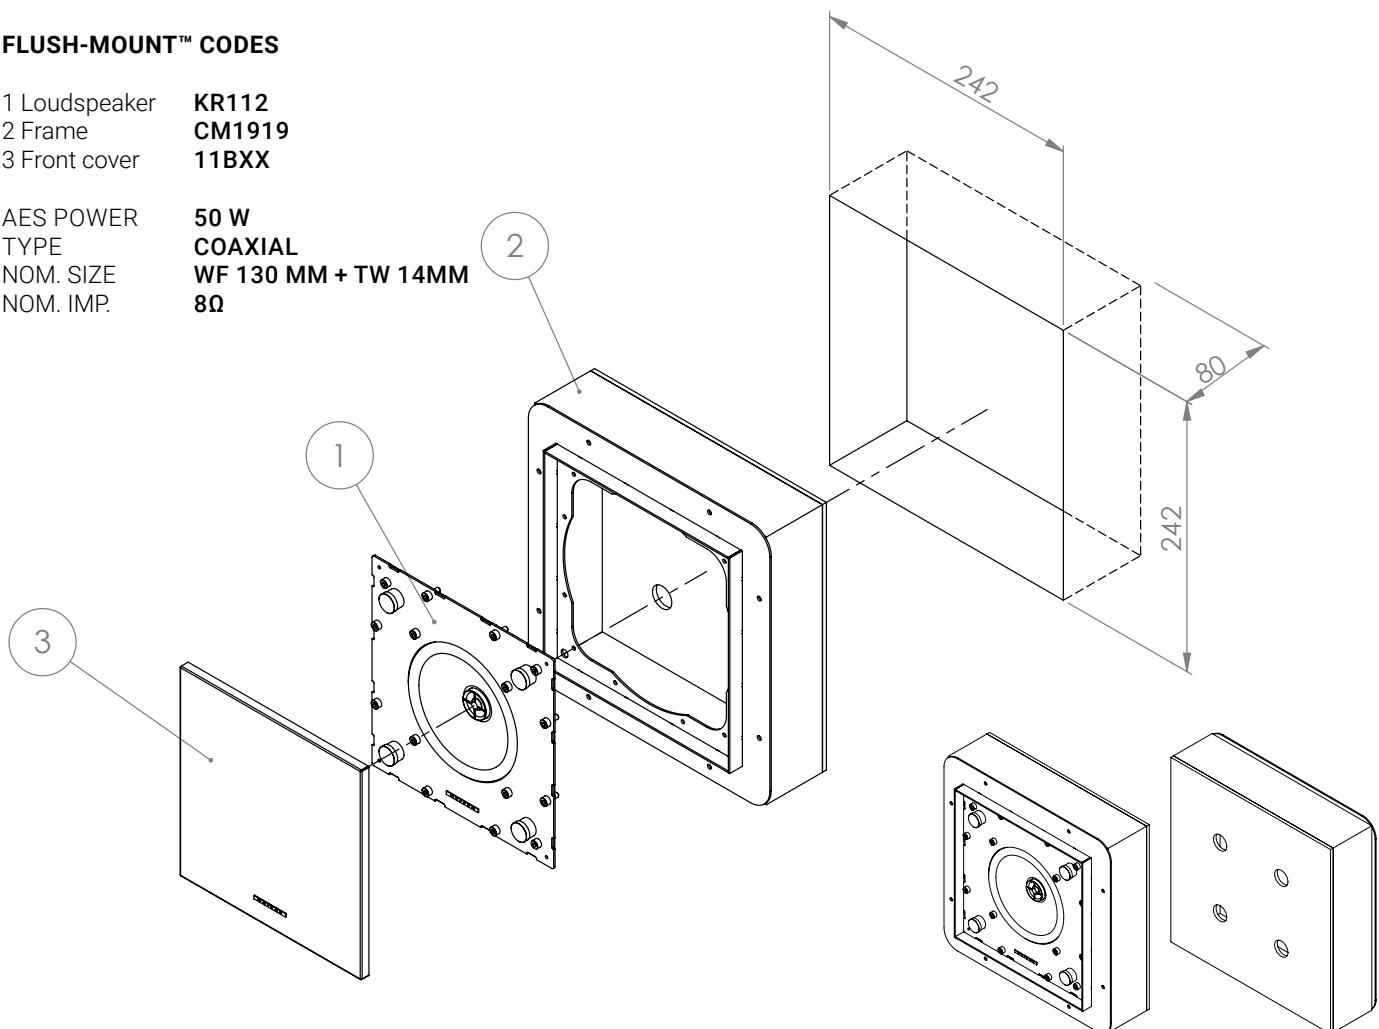


INST. INSTRUCTIONS KR112 / CM1919 Flush-Mount™ Concrete wall

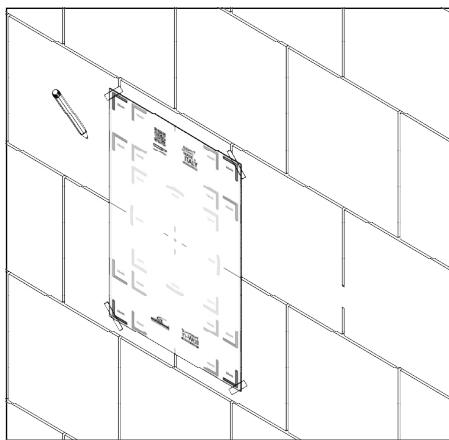


1 Jig set

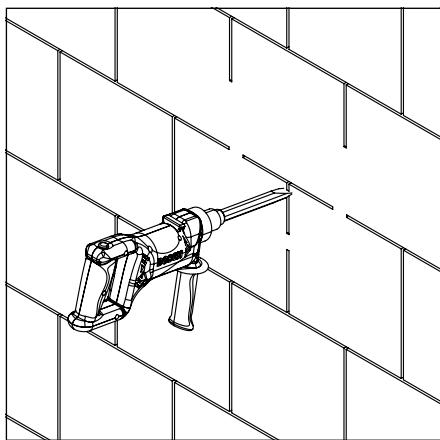


2

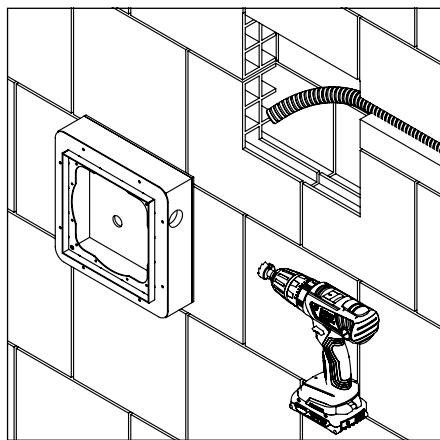


3

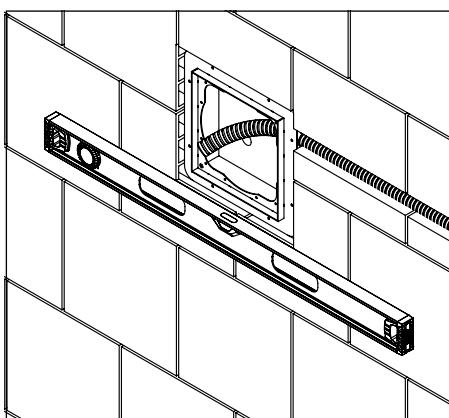


4

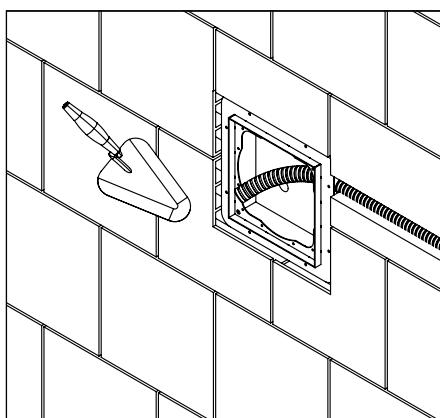


5

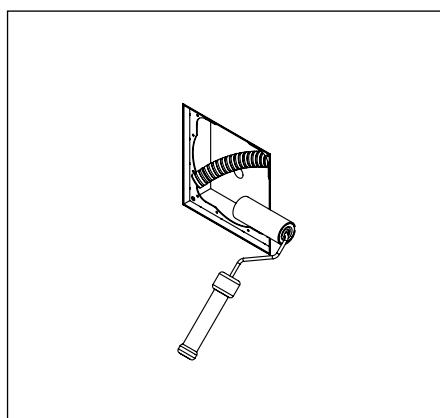


6

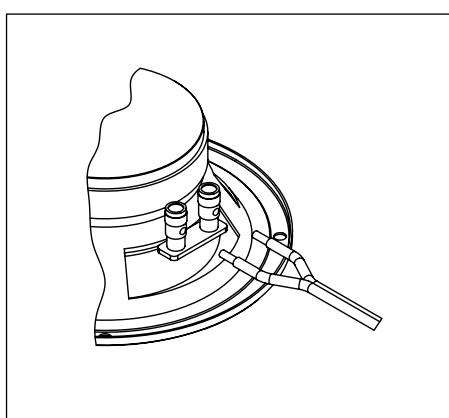


7

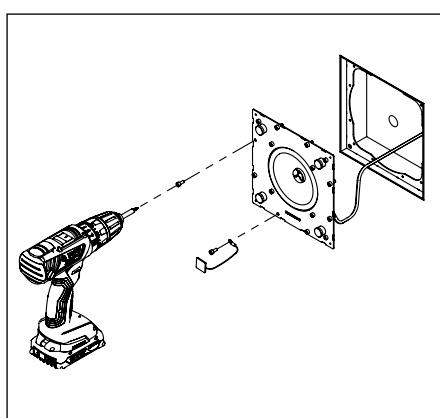


8

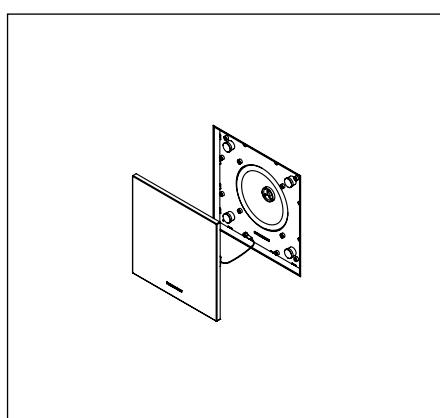

9

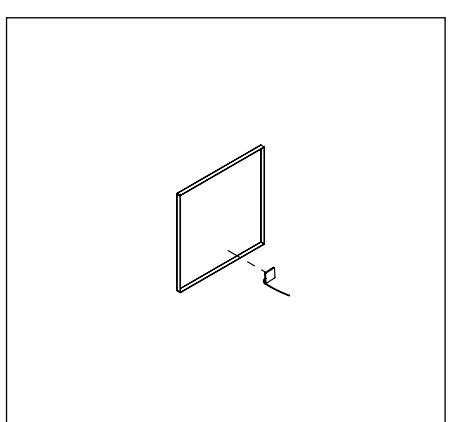

10

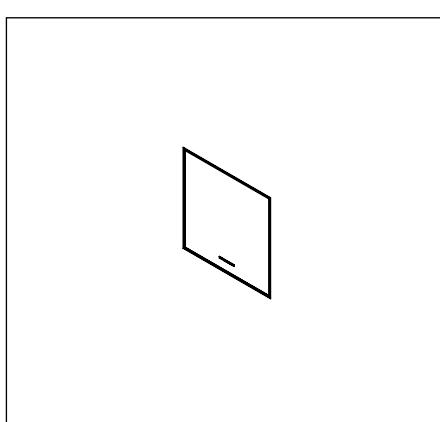

11

