# SIC119

# In-Wall for Flush-Mount Installation

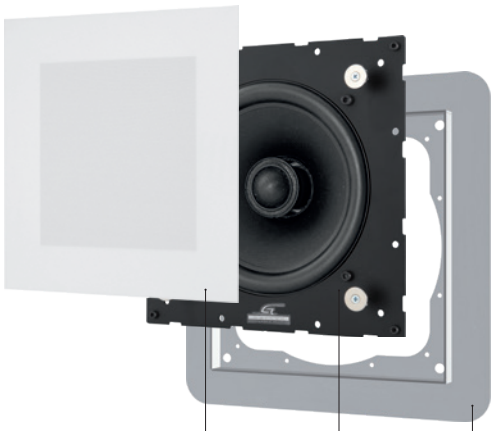

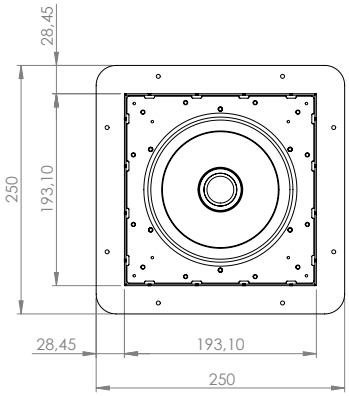


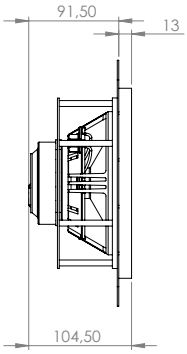





Minimum depth recommended

## White Front cover

Code: **11AXX1**

| | |
|---|---|
| **Dimensions** HxWxD (cm) | 19,0 x 19,0 x 0,3 |
| **Weight** (Kg) | 0,17 |
| **Finishes** | White fabric |

## Loudspeaker

Code (8 Ω): **SIC119**

| | |
|---|---|
| **Type** | 2 way coax |
| **Components** | Neodymium Tw, doped paper Wf |
| **Power RMS / Max** (8 Ω) | 120 / 240 |
| **Freq. resp.** (Hz) | 65 - 20k |
| **Sensitivity** dB (2,83V/1m) | 92 |
| **Nom. impedance** (Ω) | 8 |
| **Woofer** Ø (cm) **Tweeter voice coil** Ø (cm) | 16,0 / 2,5 |
| **Dimensions** HxWxD (cm) | 19,0 x 19,0 x 9,5 |
| **Weight** (Kg) | 2,08 |

## Frame

Code: **CC1919**

| | |
|---|---|
| **Dimensions** HxWxD (cm) | 25,0 x 25,0 x 1,5 |
| **Installation hole plasterboard** HxWxD (cm) | 19,5 x 19,5 x 11,0 D1 |
| **Weight** (Kg) | 0,54 |
| **Materials** | Steel |

Installation hole plasterboard

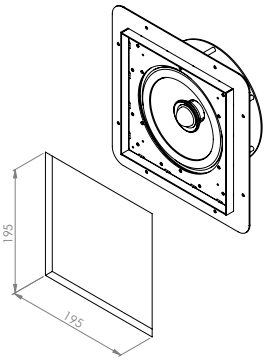


**Fabric** **Indoor Speaker** **Plasterboard**

Garvan ACOUSTIC WELLNESS

# SIC119

# In-Wall for EasyFit Installation

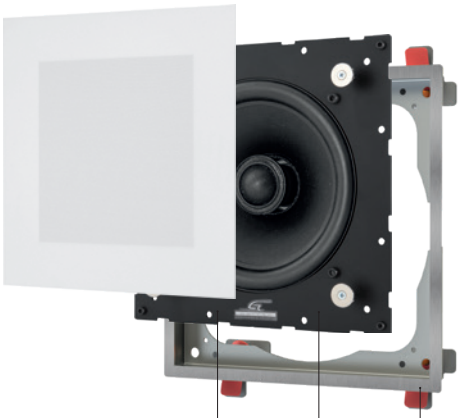

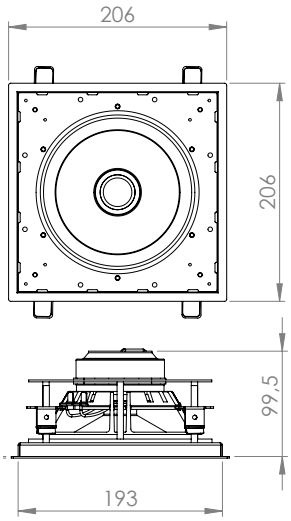











Minimum depth recommended

## White front cover

Code: **11AXX1**

| | |
|---|---|
| **Dimensions** HxWxD (cm) | 19,0 x 19,0 x 0,3 |
| **Weight** (Kg) | 0,17 |
| **Finishes** | White fabric |

## Loudspeaker

Code (8 Ω): **SIC119**

| | |
|---|---|
| **Type** | 2 way coax |
| **Components** | Neodymium Tw, doped paper Wf |
| **Power RMS / Max** (8 Ω) | 120 / 240 |
| **Freq. resp.** (Hz) | 65 - 20k |
| **Sensitivity** dB (2,83V/1m) | 92 |
| **Nom. impedance** (Ω) | 8 |
| **Woofer** Ø (cm)<br>**Tweeter voice coil** Ø (cm) | 16,0 / 2,5 |
| **Dimensions** HxWxD (cm) | 19,0 x 19,0 x 9,5 |
| **Weight** (Kg) | 2,08 |

## Frame

Code: **CF191S**
Code: **CF191E**

| | |
|---|---|
| **Dimensions** HxWxD (cm) | 20,6 x 20,6 x 7,5 |
| **Installation hole plasterboard** HxWxD (cm) | 19,5 x 19,5 x 11,0 **D1** |
| **Weight** (Kg) | 0,38 |
| **Materials** | Steel |

INSTALLATION HOLE PLASTERBOARD




**Fabric** **Indoor Speaker** **Primer** **Satin stainless steel**